


AJAY ELECTRIC & METAL INDUSTRIES




SR NO.	ITEM	PAGE NO.
1)	COPPER TUBULAR TERMINALS (MEDIUM DUTY)	2
2)	COPPER TUBULAR TERMINALS (HEAVY DUTY)	3
3)	COPPER TUBULAR TERMINALS (HEAVY DUTY) LONG BARREL	4
4)	COPPER TUBULAR TERMINALS (HEAVY DUTY) 4 HOLE	5
5)	COPPER TUBULAR TERMINALS (HEAVY DUTY) LONG PALM	6
6)	COPPER SOLDERING TYPE TUBULAR END TERMINAL	7
7)	COPPER CRIMPING IN LINE CONNECTORS	8
8)	COPPER REDUCER TYPE TERMINAL ENDS (WIRE PIN)	9
9)	WEAK-BACK OPEN CRIMPING FERRULES (SOLDERING TYPE)	10
10)	COPPER END SEALING FERRULES	11
11)	COPPER END SEALING FERRULES (INSULATED)	11
12)	ALUMINIUM TERMINAL ENDS FOR AL-XPLE CONDUCTORS	12
13)	ALUMINIUM FERRULES FOR AL-XPLE CONDUCTORS	12
14)	COMPRESSION TYPE ALUMINIUM TUBULAR TERMINALS	13
15)	COMPRESSION TYPE ALUMINIUM TUBULAR TERMINALS LONG BARREL	14
16)	COMPRESSION TYPE ALUMINIUM CRIMPING FERRULES	15
17)	COMPRESSION TYPE ALUMINIUM CRIMPING FERRULES (DOUBLE HOLE)	15
18)	ALUMINIUM REDUCER TYPE TERMINAL ENDS (WIRE PIN)	16
19)	COPPER RING TONGUE TERMINAL ENDS FOR SOLDERLESS CRIMPING TO COPPER OR ALUMINIUM CONDUCTORS	17
20)	COPPER RING TONGUE TERMINAL ENDS (INSULATED) FOR SOLDERLESS CRIMPING TO COPPER/ALUMINIUM CONDUCTORS	19
21)	COPPER PIN TYPE TERMINAL ENDS	21
22)	COPPER PIN TYPE TERMINAL ENDS (INSULATED)	21
23)	COPPER RECTANGULAR TONGUE FORK TERMINAL ENDS	22
24)	COPPER RECTANGULAR TONGUE FORK TERMINAL ENDS (INSULATED)	22
25)	COPPER RECTANGULAR TONGUE FORK TERMINAL ENDS (METAL REINFORCEMENT)	23
26)	COPPER RECTANGULAR TONGUE FORK TERMINAL ENDS	23
27)	COPPER RING TONGUE FORK TERMINAL ENDS (INSULATED)	24

COPPER TUBULAR TERMINALS (MEDIUM DUTY)



Size sq. mm	E	A	C	B	D	F	G	H	J	AEMCO Cat No.
2.5	5.2	2	3.7	7	9.0	1.0	5	5	20	CL-701
4	6.5	3.1	4.8	7	11.0	1.0	6	6	22	CL-702
6	6.5	3.8	5.5	9	11.0	1.1	6	6	24	CL-703
10	6.4	4.4	6.2	9	11.0	1.3	6	6	24	CL-704
16	6.4	5.4	7.1	12	11.0	1.6	6	8	30	CL-705
25	6.4	7	9	12	13.0	2.0	8	12	37	CL-706
25	8.2	7	9	12	13.0	2.0	8	12	37	CL-740
35	6.4	8	10	12	14.6	2.0	8	12	37	CL-707
35	8.2	8	10	12	14.6	2.0	8	12	37	CL-708
50	6.4	9.3	11.3	16	16.6	2.0	9	12	45	CL-709
50	8.2	9.3	11.3	16	16.6	2.0	9	12	45	CL-710
50	10.2	9.3	11.3	16	16.6	2.0	9	12	45	CL-711
70	8.2	11.6	13.8	18	20.4	2.2	13	15	56	CL-712
70	10.2	11.6	13.8	18	20.4	2.2	13	15	56	CL-713
70	12.8	11.6	13.8	18	20.4	2.2	13	15	56	CL-714
95	10.2	12.8	15.6	20	23.0	2.8	13	15	58	CL-715
95	12.8	12.8	15.6	20	23.0	2.8	13	15	58	CL-716
120	10.2	14.8	17.8	22	26.0	3.0	14	16	62	CL-717
120	12.8	14.8	17.8	22	26.0	3.0	14	16	62	CL-718
120	16.2	14.8	17.8	22	26.0	3.0	14	16	62	CL-719
150	10.2	16	19.6	26	28.0	3.6	15	18	70	CL-720
150	12.8	16	19.6	26	28.0	3.6	15	18	70	CL-721
150	16.2	16	19.6	26	28.0	3.6	15	18	70	CL-722
185	12.8	18	22	28	32.0	4.0	21	21	83	CL-723
185	16.2	18	22	28	32.0	4.0	21	21	83	CL-724
225	12.8	20	24	32	34.0	4.0	24	24	95	CL-734
225	16.2	20	24	32	34.0	4.0	24	24	95	CL-735
240	16.2	22	26	34	38.6	4.0	24	24	97	CL-725
240	20.3	22	26	34	38.6	4.0	24	24	97	CL-726
300	16.2	24	28.7	36	42.0	4.7	25	25	103	CL-727
300	20.3	24	28.7	36	42.0	4.7	25	25	103	CL-728
400	20.3	28	33.2	44	49.0	4.7	27	27	116	CL-729
500	20.3	30	36	48	53.0	6.0	27	27	120	CL-730
630	20.3	35	41.5	53	61.0	6.5	31	33	137	CL-731
800	-	39	46.3	68	68.0	7.3	37	38	165	CL-732
1000	-	43.5	53.8	90	77.0	10.3	45	45	210	CL-733


COPPER TUBULAR TERMINALS (HEAVY DUTY)



Size (sq.mm)	E	A	C	B	D	F	G	H	L-1	J	AEMCO Cat No.
1.5	5.2	1.8	3.7	5	8	1.0	4	5	12	16	CL-801
1.5	6.5	1.8	3.7	5	10	0.8	3	6	13	18	CL-802
2.5	4.2	2.4	4.0	7	8	1.0	4	5	14	18	CL-803
2.5	5.2	2.4	4.0	7	10	0.8	5	6	15	20	CL-804
2.5	6.5	2.4	4.0	7	10	0.8	5	6	15	20	CL-805
4	5.2	3.1	4.8	7	10	1.0	5	6	15	20	CL-806
4	6.5	3.1	4.8	7	10	1.0	5	6	15	20	CL-807
6	5.2	3.8	5.5	9	10	1.2	5	6	18	23	CL-808
6	6.5	3.8	5.5	9	12	1.0	6	9	21	27	CL-809
6	8.2	3.8	5.5	9	12	1.0	6	9	21	27	CL-810
10	6.5	4.5	6.2	9	12	1.2	6	7	19	25	CL-811
10	8.2	4.5	6.2	9	12	1.2	6	9	21	27	CL-812
16	6.5	5.4	7.1	12	12	1.4	7	7	23	30	CL-813
16	8.2	5.4	7.1	12	12	1.4	7	9	25	32	CL-814
20	8.2	6.0	7.7	12	12	1.6	7	9	25	32	CL-815
25	6.5	6.8	8.8	12	13	2.0	7	7	23	30	CL-816
25	8.2	6.8	8.8	12	17	1.3	10	11	27	37	CL-817
25	10.5	6.8	8.8	12	17	1.3	10	11	27	37	CL-818
35	6.5	8.2	10.6	12	15	2.4	9	9	26	35	CL-819
35	8.2	8.2	10.6	12	15	2.4	9	9	26	35	CL-820
35	10.5	8.2	10.6	12	18	1.9	10	11	28	38	CL-821
50	8.2	9.5	12.4	16	18	2.9	10	11	33	43	CL-822
50	10.5	9.5	12.4	16	18	2.9	10	11	33	43	CL-823
70	8.2	11.2	14.7	18	21	3.5	12	13	38	50	CL-824
70	10.5	11.2	14.7	18	21	3.5	12	13	38	50	CL-825
70	13.0	11.2	14.7	18	21	3.5	12	13	38	50	CL-826
95	10.5	13.5	17.4	20	25	3.9	13	13	42	55	CL-827
95	13.0	13.5	17.4	20	25	3.9	13	13	42	55	CL-828
120	13.0	15.5	19.4	22	28	4.4	14	14	46	60	CL-829
120	17.0	15.5	19.4	22	28	4.4	16	16	48	64	CL-830
150	13.0	16.5	21.2	26	30	4.7	16	16	53	69	CL-831
150	17.0	16.5	21.2	26	30	4.7	16	16	53	69	CL-832
185	17.0	18.5	23.5	32	34	5.0	17	17	61	78	CL-833
240	17.0	21.0	26.5	38	38	5.5	20	20	72	92	CL-834
240	21.0	21.0	26.5	38	38	5.5	20	20	72	92	CL-835
300	17.0	23.5	30.0	43	43	6.5	22	22	79	101	CL-836
300	21.0	23.5	30.0	43	43	6.5	22	22	79	101	CL-837
400	17.0	26.8	34.8	50	50	8.0	26	26	88	114	CL-838
400	21.0	26.8	34.8	50	50	8.0	26	26	88	114	CL-839
500	21.0	30.0	39.0	56	56	9.0	28	28	96	124	CL-840
550	21.0	31.7	41.4	60	60	9.7	30	30	102	132	CL-841
630	21.0	35.0	45.0	65	65	10.0	33	33	111	144	CL-842
800	-	39.0	50.6	73	73	11.6	36	36	134	170	CL-843
1000	-	43.0	56.2	81	81	13.2	44	45	156	200	CL-844




COPPER TUBULAR TERMINALS TERMINAL ENDS (HEAVY DUTY) LONG BARREL



Size sq mm.	E	A	C	B	D	F	G	H	J	AEMCO Cat No.
16	6.4	5.4	7.2	16	11	1.6	6	8	34	CL-605
25	8.2	7.0	9.0	16	13	2.0	5	12	41	CL-606
35	8.2	8.0	10.6	20	15	2.6	9	14	48	CL-607
50	8.2	9.3	12.3	26	17	3.0	10	16	59	CL-608
70	10	11.5	15.0	28	21	3.4	12	19	66	CL-609
95	13	12.8	17.0	32	24	4.2	12	20	74	CL-610
120	13	14.8	19.6	35	28	4.8	14	23	82	CL-611
150	13	16.1	21.2	38	31	5.1	14	24	86	CL-612
185	13	18.0	24.0	43	34	6.0	17	23	95	CL-613
225	13	21.0	27.0	40	39	6.0	20	20	94	CL-621
240	13	22.0	28.0	50	40	6.0	20	30	112	CL-622
240	16	22.0	28.0	50	40	6.0	20	30	112	CL-614
300	16	24.7	31.8	47	46	7.0	27	27	115	CL-615
400	20	29.3	37.3	56	53	8.1	30	31	130	CL-616
500	20	31.0	41.0	60	59	10.0	32	33	140	CL-617
630	20	35.0	45.0	69	65	10.0	34	35	154	CL-618
800	-	39.0	51.0	77	74	12.0	39	39	180	CL-619
1000	-	43.5	57.0	100	82	13.5	45	45	220	CL-620




COPPER TUBULAR TERMINALS TERMINAL ENDS (HEAVY DUTY) LONG PALM

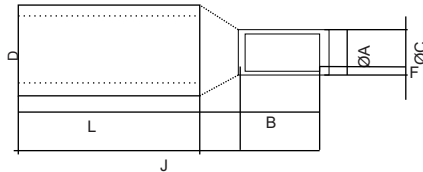

Size sq. mm.	A	C	B	D	F	L	J	AEMCO Cat No.
50	9.5	12.4	16	18.4	2.9	42	64	CL-845
70	11.2	14.7	18	21.4	3.5	50	75	CL-846
95	13.5	17.4	20	25.4	3.9	52	81	CL-847
120	15.0	19.4	22	28.4	4.4	56	88	CL-848
150	16.5	21.2	26	30.5	4.7	64	101	CL-849
185	18.5	23.5	32	34.5	5.0	68	112	CL-850
240	21.0	26.5	38	38.5	5.5	80	132	CL-851
300	23.5	30.0	42	43.5	6.5	88	145	CL-852
400	26.8	34.8	44	50.6	8.0	104	166	CL-853
500	30.0	39.0	48	56.6	9.0	112	180	CL-854
630	35.0	45.0	56	65.7	10.0	132	210	CL-855




COPPER TUBULAR TERMINALS ENDS (4 HOLE LUGS)



Size (sq.mm.)	E	A	C	B	D	H	J	AEMCO Cat No.
300	8.5	23.5	30	42	58	20	115	CL-300-E8
400	8.5	28.5	36.5	44	58	20	120	CL-400-E8
500	8.5	30	39	48	58	20	124	CL-500-E8
630	8.5	35	45	56	65	25	144	CL-630-E8
630	10.5	35	45	56	65	25	144	CL-630-E10
800	8.5	39	50.6	78	73	30	170	CL-800-E8
1000	8.5	43	56.2	90	81	40	200	CL-1000-E8




COPPER TUBULAR TERMINALS ENDS (BELL MOUTH)




Size (sq.m.m.)	E	A	C	B	D	F	G	H	L-1	J	AEMCO Cat No.
1.5	5.2	1.8	3.7	5	8	1.0	4	5	12	16	CLB M-801
1.5	6.5	1.8	3.7	5	10	0.8	3	6	13	18	CLB M-802
2.5	4.2	2.4	4.0	7	8	1.0	4	5	14	18	CLB M-803
2.5	5.2	2.4	4.0	7	10	0.8	5	6	15	20	CLB M-804
2.5	6.5	2.4	4.0	7	10	0.8	5	6	15	20	CLB M-805
4	5.2	3.1	4.8	7	10	1.0	5	6	15	20	CLB M-806
4	6.5	3.1	4.8	7	10	1.0	5	6	15	20	CLB M-807
6	5.2	3.8	5.5	9	10	1.2	5	6	18	23	CLB M-808
6	6.5	3.8	5.5	9	12	1.0	6	9	21	27	CLB M-809
6	8.2	3.8	5.5	9	12	1.0	6	9	21	27	CLB M-810
10	6.5	4.5	6.2	9	12	1.2	6	7	19	25	CLB M-811
10	8.2	4.5	6.2	9	12	1.2	6	9	21	27	CLB M-812
16	6.5	5.4	7.1	12	12	1.4	7	7	23	30	CLB M-813
16	8.2	5.4	7.1	12	12	1.4	7	9	25	32	CLB M-814
20	8.2	6.0	7.7	12	12	1.6	7	9	25	32	CLB M-815
25	6.5	6.8	8.8	12	13	2.0	7	7	23	30	CLB M-816
25	8.2	6.8	8.8	12	17	1.3	10	11	27	37	CLB M-817
25	10.5	6.8	8.8	12	17	1.3	10	11	27	37	CLB M-818
35	6.5	8.2	10.6	12	15	2.4	9	9	26	35	CLB M-819
35	8.2	8.2	10.6	12	15	2.4	9	9	26	35	CLB M-820
35	10.5	8.2	10.6	12	18	1.9	10	11	28	38	CLB M-821
50	8.2	9.5	12.4	16	18	2.9	10	11	33	43	CLB M-822
50	10.5	9.5	12.4	16	18	2.9	10	11	33	43	CLB M-823
70	8.2	11.2	14.7	18	21	3.5	12	13	38	50	CLB M-824
70	10.5	11.2	14.7	18	21	3.5	12	13	38	50	CLB M-825
70	13.0	11.2	14.7	18	21	3.5	12	13	38	50	CLB M-826
95	10.5	13.5	17.4	20	25	3.9	13	13	42	55	CLB M-827
95	13.0	13.5	17.4	20	25	3.9	13	13	42	55	CLB M-828
120	13.0	15.5	19.4	22	28	4.4	14	14	46	60	CLB M-829
120	17.0	15.5	19.4	22	28	4.4	16	16	48	64	CLB M-830
150	13.0	16.5	21.2	26	30	4.7	16	16	53	69	CLB M-831
150	17.0	16.5	21.2	26	30	4.7	16	16	53	69	CLB M-832
185	17.0	18.5	23.5	32	34	5.0	17	17	61	76	CLB M-833
240	17.0	21.0	26.5	38	38	5.5	20	20	72	92	CLB M-834
240	21.0	21.0	26.5	38	38	5.5	20	20	72	92	CLB M-835
300	17.0	23.5	30.0	43	43	6.5	22	22	79	101	CLB M-836
300	21.0	23.5	30.0	43	43	6.5	22	22	79	101	CLB M-837
400	17.0	26.8	34.8	50	50	8.0	26	26	88	114	CLB M-838
400	21.0	26.8	34.8	50	50	8.0	26	26	88	114	CLB M-839
500	21.0	30.0	39.0	56	56	9.0	28	28	96	124	CLB M-840
550	21.0	31.7	41.4	60	60	9.7	30	30	102	132	CLB M-841
630	21.0	35.0	45.0	65	65	10.0	33	33	111	144	CLB M-842
800	-	39.0	50.6	73	73	11.6	36	36	134	170	CLB M-843
1000	-	43.0	56.2	81	81	13.2	44	45	156	200	CLB M-844

COPPER TUBULAR TERMINALS LONG BARREL (MEDIUM DUTY)

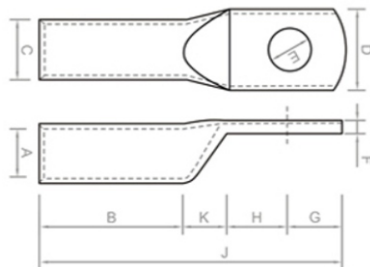


Size sq. mm	E	A	C	B	D	F	G	H	J	AEMCO Cat No.
2.5	5.2	2	10.5	3.7	9	1	5	5	23.5	CL-901
4	6.5	3.1	10.5	4.8	11	1	6	6	25.5	CL-902
6	6.5	3.8	13.5	5.5	11	1.1	6	6	28.5	CL-903
10	6.4	4.4	13.5	6.2	11	1.3	6	6	28.5	CL-904
16	6.4	5.4	18	7.2	11	1.6	6	8	36	CL-905
25	6.4	7	18	9	13	2	8	12	43	CL-906
25	8.2	7	18	9	13	2	8	12	43	CL-940
35	6.4	8	18	10	14.6	2	8	12	43	CL-907
35	8.2	8	18	10	14.6	2	8	12	43	CL-908
50	6.4	9.3	24	11.3	16.6	2	9	12	53	CL-909
50	8.2	9.3	24	11.3	16.6	2	9	12	53	CL-910
50	10.2	9.3	24	11.3	16.6	2	9	12	53	CL-911
70	8.2	11.6	27	13.8	20.4	2.2	13	15	65	CL-912
70	10.2	11.6	27	13.8	20.4	2.2	13	15	65	CL-913
70	12.8	11.6	27	13.8	20.4	2.2	13	15	65	CL-914
95	10.2	12.8	30	15.6	23	2.7	13	15	68	CL-915
95	12.8	12.8	30	15.6	23	2.7	13	15	68	CL-916
120	10.2	14.8	33	17.8	26	3	14	16	73	CL-917
120	12.8	14.8	33	17.8	26	3	14	16	73	CL-918
120	16.2	14.8	33	17.8	26	3	14	16	73	CL-919
150	10.2	16	39	19.6	28	3.1	15	18	83	CL-920
150	12.8	16	39	19.6	28	3.1	15	18	83	CL-921
150	16.2	16	39	19.6	28	3.1	15	18	83	CL-922
185	12.8	18	45	22	32	3.5	21	21	98	CL-923
185	16.2	18	45	22	32	3.5	21	21	98	CL-924
225	12.8	20	51	24	34	4	24	24	112	CL-934
225	16.2	20	51	24	34	4	24	24	112	CL-935
240	16.2	22	54	26	38.6	4	24	24	155	CL-925
240	20.3	22	54	26	38.6	4	24	24	155	CL-926
300	16.2	24	58	28.7	42	4.7	25	26	122	CL-927
300	20.3	24	58	28.7	42	4.7	25	26	122	CL-928
400	20.3	28	66	33.2	49	4.7	27	27	138	CL-929
500	20.3	30	72	36	53	6	27	27	144	CL-930
630	20.3	35	83	41.5	61	6.5	31	33	165	CL-931
800	-	39	98	46.3	68.6	7.3	37	38	198	CL-932
1000	-	43.5	135	58.8	78.7	10.3	45	45	255	CL-933



Size (sq.mm.)	E	A	C	B	D	F	G	H	J	AEMCO Cat No.
15	3.2	3.9	4.8	7	7	0.9	4	6	19	LEI-201
30	5.3	5.2	6.3	9	9	1.1	5	6	23	LEI-202
60	6.4	8.1	9.5	14	14	1.4	9	9	36	LEI-203
100	10.5	10.9	12.7	19	19	1.8	11	11	49	LEI-204
150	10.5	13.9	15.9	23	24	2.0	13	13	57	LEI-205
200	13	16.6	19.0	27	28	2.4	14	14	66	LEI-206
300	13	19.0	22.2	28	33	3.2	19	20	80	LEI-207
400	17	22.2	25.4	32	38	3.2	21	21	89	LEI-208
500	17	25.4	28.6	38	43	3.2	25	25	105	LEI-209
600	20.3	27.8	31.8	44	47	4.0	27	27	115	LEI-210
800	24.5	31.7	38.1	47	56	6.4	28	28	121	LEI-211
1000	24.5	38.1	44.5	56	66	6.4	34	42	152	LEI-212
1000	-	50.0	57.3	62	85	7.3	36	46	164	LEI-213
LIGHT DUTY										
15	5.3	4.8	6.2	10	9	1.4	5	6	24	LBSS-1
30	7.1	6.4	8.0	13	12	1.6	6	10	33	LBSS-2
60	11.0	9.5	11.3	14	17	1.8	9	13	44	LBSS-3
100	12.0	12.0	13.9	19	21	2.0	13	14	55	LBSS-4
150	14.0	14.0	17.1	22	25	2.8	14	16	62	LBSS-5
200	14.0	17.0	19.9	29	29	3.2	17	21	78	LBSS-6
300	17.0	21.0	24.2	32	36	3.6	20	21	86	LBSS-7
400	17.0	24.0	27.8	38	41	4.0	24	24	100	LBSS-8
500	20.0	26.0	31.4	44	46	5.2	27	24	111	LBSS-9
HEAVY DUTY										
6	5.5	4.4	6.0	9.5	9	1.6	5.0	6	24	LBSS-21
10-16	6.6	6.0	8.0	13.0	11	2.0	6.5	7	31	LBSS-22
25	9.0	7.6	10.0	13.0	14	2.4	11.0	12	41	LBSS-23
35	9.0	9.6	12.0	16.0	18	2.4	11.0	12	46	LBSS-24
50-70	9.0	12.0	16.0	20.0	23	4.7	13.0	14	56	LBSS-25
95	11.0	14.0	19.6	22.0	28	5.3	14.0	16	62	LBSS-26
120	14.0	17.0	22.6	28.0	34	5.9	17.0	21	78	LBSS-27
150-185	14.0	21.0	28.0	32.0	40	7.4	20.0	21	86	LBSS-28
240	18.0	24.0	31.0	38.0	45	7.2	24.0	24	100	LBSS-29
300	18.0	26.0	34.3	44.0	49	8.1	27.0	24	110	LBSS-30
400-500	22.0	32.0	41.0	48.0	59	9.2	30.0	25	121	LBSS-31
630	26.0	37.0	46.3	56.0	67	9.8	34.0	29	140	LBSS-32

COPPER CRIMPING IN LINE CONNECTORS




Size (sq.m m)	A	C	J	AEMCO Cat No.
1.5	1.6	3.2	15	LEH-453
2.5	2.0	4.2	15	CPC-204
2.5	2.0	3.7	15	CPC-201
2.5	2.6	4.6	15	CPC-202
4	3.1	4.7	15	CPC-203
6	3.8	5.5	15	CPC-205
10	4.4	6.2	15	CPC-206
16	5.4	7.2	20	CPC-207
25	7.0	9.0	25	CPC-208
35	8.0	10.0	30	CPC-209
50	9.3	11.3	35	CPC-210
70	11.6	13.8	40	CPC-211
95	12.9	15.6	45	CPC-212
120	14.8	17.8	50	CPC-213
150	16.0	19.6	55	CPC-214
185	18.0	22.0	60	CPC-215
225	21.0	25.0	65	CPC-216
240	22.0	26.0	65	CPC-217
300	24.0	28.7	75	CPC-218
400	28.0	33.2	90	CPC-219
500	30.0	36.0	95	CPC-220
630	35.0	41.5	105	CPC-221
800	39.0	46.3	120	CPC-222
1000	43.5	53.8	150	CPC-223

HEAVY DUTY


1.5	1.8	3.7	12	CPC-301
2.5	2.4	4	15	LEH-454
4.0	3.1	4.8	15	CPC-302
6	3.8	5.5	15	CPC-205
10	4.5	6.2	20	CPC-303
16	5.4	7.1	20	CPC-304
25	6.8	8.8	32	CPC-306
35	8.2	10.6	36	CPC-307
50	9.5	12.4	40	CPC-308
70	11.2	14.7	40	CPC-309
70	11.2	14.7	50	CPC-329
95	13.5	17.4	45	CPC-310
95	13.5	17.4	60	CPC-328
120	15	19.4	45	CPC-311
120	15	19.4	65	CPC-329
150	16.5	21.2	55	CPC-312
150	16.5	21.2	70	CPC-330
185	18.5	23.5	65	CPC-313
185	18.5	23.5	75	CPC-331
240	21	26.5	80	CPC-314
240	21	26.5	90	CPC-332
300	23.5	30	85	CPC-315
300	23.5	30	100	CPC-333
400	26.8	34.8	90	CPC-316
400	26.8	34.8	120	CPC-334
500	30	39	100	CPC-317
500	30	39	130	CPC-335
630	35	45	110	CPC-319
630	35	45	140	CPC-336
800	39	50.6	150	CPC-320
1000	43	56.2	170	CPC-321

COPPER REDUCER TYPE TERMINAL ENDS (WIRE PIN)

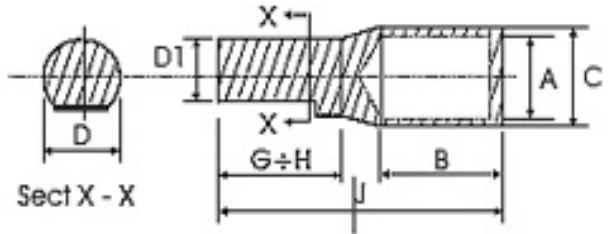

Size (sq.mm.)	A	C	D	D1	B	G+H	J	AEMCO Cat No.
1.5	1.8	4.7	3.8	3.3	6	10	20	WPC-1.5
2.5	2.5	4.7	3.8	3.3	6	10	20	WPC-2.5
2.5	2.5	4.7	3.8	4.0	6	10	20	WPC-2.5A
4	2.8	4.7	3.8	3.3	6	10	20	WPC-4
4	2.8	4.7	4.5	4.0	6	10	20	WPC-4A
6	3.1	4.7	3.8	3.3	6	10	20	WPC-6
6	3.1	4.7	4.5	4.0	6	10	20	WPC-6A
10	3.8	5.5	4.5	4.0	9	10	23	WPC-10
10	3.8	5.5	3.8	3.3	9	10	23	WPC-10A
10	4.4	6.2	3.8	3.3	9	10	23	WPC-10B
10	4.4	6.2	4.5	4.0	9	10	23	WPC-10C
16	5.4	7.2	6.0	5.5	12	20	37	WPC-16
16	5.4	7.2	6.0	5.5	12	15	32	WPC-16A
16	5.4	7.2	3.8	3.3	12	13	30	WPC-16B
25	7.0	9.0	6.0	5.5	12	15	32	WPC-25A
25	7.0	9.0	7.5	6.5	12	20	37	WPC-25B
35	8.0	10.0	7.5	6.5	12	20	37	WPC-35
50	9.3	11.3	7.5	6.5	16	20	41	WPC-50
70	11.5	13.8	11.5	10.5	18	32	55	WPC-70
70	11.5	13.8	7.5	6.5	18	20	43	WPC-70A
70	11.5	13.8	11.5	10.5	18	25	48	WPC-70B
95	12.9	15.6	11.5	10.5	20	25	51	WPC-95A
95	12.9	15.6	15.6	14.0	20	27	53	WPC-95B
95	12.9	15.6	7.5	6.5	20	22	48	WPC-95C
120	15.0	18.0	11.5	10.5	22	25	53	WPC-120
120	15.0	18	7.5	6.5	22	22	50	WPC-120A
120	15.0	18.0	11.5	10.5	22	32	60	WPC-120B
120	15.0	18.0	15.6	14.0	22	32	60	WPC-120C
150	16.0	19.6	15.6	14.0	26	32	64	WPC-150
150	16.0	19.6	11.5	10.5	26	32	64	WPC-150A
185	18.0	22.0	15.6	14.0	32	32	70	WPC-185
185	18.0	22.0	11.5	10.5	32	32	70	WPC-185A
225	21.0	26.0	15.6	14.0	38	32	78	WPC-225A
225	21.0	26.0	21.0	18.0	38	42	88	WPC-225B
240	22.0	26.0	15.6	14.0	38	32	78	WPC-240A
240	22.0	26.0	16.0	15.0	38	42	88	WPC-240B
300	24.0	28.7	16.0	15.0	42	42	92	WPC-300
300	24.0	28.7	15.6	14.0	42	32	82	WPC-300A
400	27.0	33.2	15.6	14.0	46	32	90	WPC-400

WEAK-BACK OPEN CRIMPING FERRULES (SOLDERING TYPE)





Size (sq.mm)	A	G	L	T	P	W	AEMCO Cat No.
ALUMINIUM CONDUCTOR							
6	3	2	20	0.8	3	-	WBCF-421
10	4.4	2	25	0.8	4	-	WBCF-422
16	5.5	2	25	1	5	1.5	WBCF-423
25	7	2	30	1	7	1.5	WBCF-424
35	8	2	35	1.25	8	1.5	WBCF-425
50	9.5	2	40	1.25	9	1.5	WBCF-426
70	12	3	45	1.4	12	3	WBCF-427
95	13.5	3	50	1.4	13	3	WBCF-428
120	15.5	4	55	1.6	15	3	WBCF-429
150	17	4	60	1.8	16	3	WBCF-430
185	18.5	4	65	2.25	18	3	WBCF-431
225	20.5	5	75	2.25	20	3	WBCF-432
240	22	5	80	2.25	21	3	WBCF-433
300	24	5	85	2.85	23	3	WBCF-434
400	28.5	7	95	3.15	27	3	WBCF-435
500	30.5	7	105	3.55	30	3	WBCF-436
625	34.5	8	115	4	33	3	WBCF-437
COPPER CONDUCTOR							
6	3	2	20	0.8	3	-	WBCF-441
10	4.4	2	25	0.8	4	-	WBCF-442
16	5.5	2	25	1	5	1.5	WBCF-443
25	7	2	30	1	7	1.5	WBCF-444
35	8	2	35	1.6	8	1.5	WBCF-445
50	9.5	2	40	1.6	9	1.5	WBCF-446
70	12	3	45	2.25	12	3	WBCF-447
95	13.5	3	50	2.25	13	3	WBCF-448
120	15.5	4	55	2.25	15	3	WBCF-449
150	17	4	60	2.85	16	3	WBCF-450
185	18.5	4	65	2.85	18	5	WBCF-451
225	20.5	5	75	3.15	20	5	WBCF-452
240	22	5	80	3.15	21	5	WBCF-453
300	24	5	85	4	23	5	WBCF-454
400	28.5	7	95	4	27	5	WBCF-455
500	30.5	7	105	5	30	5	WBCF-456
625	34.5	8	115	5.6	33	5	WBCF-457

COPPER END SEALING FERRULES



Size (sq mm)	A	C	C-1	K	R	J	AEMCO Cat No.
0.5	1.0-1.1	1.4-1.5	2.1	0.7	0.8	6	EH-508
0.75	1.4-1.5	1.8-1.9	2.5	0.7	0.8	6	EH-509
1.0	1.6-1.7	2.0-2.1	2.7	0.7	0.8	6	EH-510
1.0	1.6-1.7	2.0-2.1	2.7	0.7	0.8	10	EH-511
1.5	1.8-1.9	2.2-2.3	2.9	1.0	1.2	7	EH-512
1.5	1.8-1.9	2.2-2.3	2.9	1.0	1.2	10	EH-513
2.5	2.3-2.4	2.7-2.8	3.5	1.0	1.2	7	EH-514
2.5	2.3-2.4	2.7-2.8	3.5	1.0	1.2	12	EH-515
4	2.8-2.9	3.2-3.3	4	1.0	1.2	9	EH-516
4	2.8-2.9	3.2-3.3	4	1.0	1.2	12	EH-517
6	3.7-3.8	4.1-4.2	4.8	1.0	1.2	10	EH-518
6	3.7-3.8	4.1-4.2	4.8	1.0	1.2	12	EH-519
6	3.7-3.8	4.1-4.2	4.8	1.0	1.2	15	EH-520
10	4.6-4.7	5.0-5.1	5.8	1.2	1.2	12	EH-521
10	4.6-4.7	5.0-5.1	5.8	1.2	1.2	15	EH-522
10	4.6-4.7	5.0-5.1	5.8	1.2	1.2	18	EH-523
16	5.9-6.0	6.3-6.4	7.5	1.5	1.6	12	EH-524
16	5.9-6.0	6.3-6.4	7.5	1.5	1.6	15	EH-525
16	5.9-6.0	6.3-6.4	7.5	1.5	1.6	18	EH-526


COPPER END SEALING FERRULES (INSULATED)



Size (sq. mm.)	A	C	L	AEMCO Cat No.
0.5	1.1	1.5	6	EH-508L6
0.5	1.1	5.5	8	EH-508L8
0.5	1.1	1.5	10	EH-508L10
0.75	1.5	1.9	6	EH-509L6
0.75	1.5	1.9	8	EH-509L8
0.75	1.5	1.9	10	EH-509L10
0.75	1.5	1.9	12	EH-509L12
1.0	1.7	2.1	6	EH-510L6
1.0	1.7	2.1	8	EH-510L8
1.0	1.7	2.1	10	EH-511L10
1.0	1.7	2.1	12	EH-511L12
1.5	1.9	2.3	8	EH-512L8
1.5	1.9	2.3	10	EH-513L10
1.5	1.9	2.3	18	EH-513L18
2.5	2.4	2.8	8	EH-514L8
2.5	2.4	2.8	12	EH-515L12
2.5	2.4	2.8	18	EH-515L18
4	2.9	3.3	10	EH-516L10
4	2.9	3.3	12	EH-517L12
4	2.9	3.3	18	EH-517L18
6	3.8	4.2	10	EH-518L10
6	3.8	4.2	12	EH-519L12
6	3.8	4.2	15	EH-520L15
6	3.8	4.2	18	EH-520L18
10	4.7	5.1	12	EH-521L12
10	4.7	5.1	15	EH-522L15
10	4.7	5.1	18	EH-523L18
16	6.0	6.4	12	EH-524L12
16	6.0	6.4	15	EH-525L15
16	6.0	6.4	18	EH-526L18




ALUMINIUM TERMINAL ENDS FOR AL-XPLE CONDUCTORS




Size (sq.mm)	E	A	C	D	F	B	K	H	G	J	AEMCO Cat No.
25	8.2	7.2	9.6	14	2.4	41	7	12	9	69	AXLPE-509
35	8.2	8.3	11.1	16	2.8	50	7	11	11	79	AXLPE-513
50	10.2	10.1	13.5	19.5	3.4	49	8	13	11	81	AXLPE-516
70	10.2	10.2	14.5	20.5	4.3	62	8	13	13	96	AXLPE-519
95	12.7	12	16.9	23.5	4.9	73	8	14	14	109	AXLPE-522
120	12.7	13.7	19	26.5	5.3	73	11	15	15	114	AXLPE-546
150	12.7	15.1	21.2	29.5	6.1	83	11	17	17	128	AXLPE-549
185	12.7	16.6	23.9	33	7.3	83	12	18	18	131	AXLPE-530
225	12.7	18.6	26.1	36	7.5	86	14	20	20	140	AXLPE-533
240	12.7	19.3	27.2	37.5	7.9	86	14	22	22	144	AXLPE-552
300	20.3	21.8	30.2	42	8.4	89	14	27	27	157	AXLPE-535
400	20.3	25	34.8	48	9.8	113	13	30	30	187	AXLPE-536
500	20.3	28.2	39.1	54	10.9	125	15	32	32	205	AXLPE-537
630	20.3	31.7	44.4	61	12.7	140	16	34	34	225	AXLPE-538
800	20.3	35.7	49.5	68	13.8	147	25	39	39	250	AXLPE-553
1000	20.3	41	56	77.5	15	160	30	45	45	280	AXLPE-554



ALUMINIUM FERRULES FOR AL-XPLE CONDUCTORS

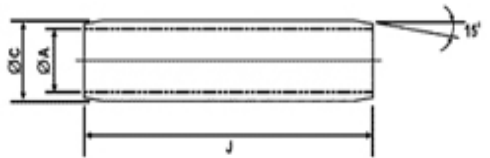


Size (sq. mm)	A	C	J	AEMCO Cat No.
25	7.2	9.6	82	AXLPE-108
35	8.3	11.1	90	AXLPE-109
50	10.1	13.5	100	AXLPE-110
70	10.2	14.5	104	AXLPE-111
95	12	16.9	108	AXLPE-112
120	13.7	19	112	AXLPE-113
150	15.1	21.2	116	AXLPE-114
185	16.6	23.9	128	AXLPE-115
225	18.6	26.1	136	AXLPE-116
240	19.3	27.2	148	AXLPE-117
300	21.8	30.2	160	AXLPE-118
400	25	34.8	182	AXLPE-119
500	28.2	39.1	190	AXLPE-120
630	31.7	44.4	200	AXLPE-121
800	35.7	49.5	225	AXLPE-122
1000	41	56	250	AXLPE-123



Size (sq.mm.)	E	A	C	B	D	F	G	H	J	AEMCO Cat No.
2.5	3.2	2	5.5	7	6.6	4	4	4	18	AL-1501
2.5	3.7	2.6	5.5	7	7.0	3	4	4	18	AL-539
4	5.2	2.9	5.5	7	12.0	1	6	7	24	AL-540
6	5.2	3.5	5.5	7	7.5	2	6	7	24	AL-1504
6	6.4	3.5	5.5	7	12.0	1	6	7	24	AL-541
10	4.2	3.8	6.2	7	8.4	2	8	9	28	AL-1505
10	6.4	4.4	7.2	9	9.7	3	8	9	30	AL-542
10	8.2	4.4	7.2	9	15.0	2	8	9	30	AL-543
16	6.4	5.4	8.3	13	11.4	3	9	11	37	AL-505
16	8.2	5.4	8.3	13	11.4	3	9	11	37	AL-506
16	10.2	5.4	8.3	13	18.0	2	9	11	37	AL-507
25	6.4	7.0	9.7	16	13.7	3	10	11	44	AL-508
25	8.2	7.0	9.7	16	13.7	3	10	11	44	AL-509
25	10.2	7.0	10.0	16	20.0	2	10	11	44	AL-510
25	12.8	7.0	10.0	16	20.0	2	10	11	44	AL-511
35	6.4	8.0	10.8	18	15.4	3	10	11	47	AL-512
35	8.2	8.0	10.8	18	15.4	3	11	11	47	AL-513
35	10.2	8.0	10.8	18	20.0	2	11	11	47	AL-514
35	12.8	8.1	10.8	18	20.0	2	11	11	47	AL-555
50	8.2	9.3	13.0	22	18.3	4	11	13	54	AL-515
50	10.2	9.3	13.0	22	18.3	4	11	13	54	AL-516
50	10.2	9.3	13.0	22	23.0	3	11	13	54	AL-544
50	12.8	9.3	9.0	22	23.0	3	12	12	54	AL-517
70	8.2	12	16.0	26	22.6	4	13	13	60	AL-518
70	10.2	12	16.0	26	22.6	4	13	13	60	AL-519
70	12.8	12	16.0	26	22.6	4	13	13	60	AL-520
95	10.2	13	17.1	28	24.5	4	14	14	64	AL-521
95	12.8	13	17.1	28	24.5	4	14	14	64	AL-522
95	16.2	13	17.1	28	24.5	4	14	14	64	AL-523
120	10.2	15	19.6	32	28.2	5	15	15	73	AL-545
120	12.8	15	19.6	32	28.2	5	15	15	73	AL-546
120	16.2	15	19.6	32	28.2	5	15	15	73	AL-547
150	10.2	17	21.5	34	30.9	5	17	17	79	AL-548
150	12.8	17	21.5	34	30.9	5	17	17	79	AL-549
150	16.2	17	21.5	34	30.9	5	17	17	79	AL-550
185	10.2	19	24.0	36	34.6	6	18	18	84	AL-551
185	12.8	19	24.0	36	34.6	6	18	18	84	AL-530
185	16.2	19	24.0	36	34.6	6	18	18	84	AL-531
225	12.8	21	27.0	40	39.0	6	20	20	94	AL-533
240	12.8	22	28.6	44	41.2	7	22	22	102	AL-552
240	16.2	22	28.6	44	41.2	7	22	22	102	AL-532
300	16.2	25	32.0	47	46.3	7	27	27	115	AL-534
300	20.3	25	32.0	47	46.3	7	27	27	115	AL-535
400	20.3	29	37.5	56	54.1	9	31	31	130	AL-536
500	20.3	31	41.0	60	58.7	10	33	33	140	AL-537
630	20.3	36	46.0	69	66.6	10	35	35	154	AL-538
800	-	39	51.0	77	73.3	12	39	39	180	AL-553
1000	-	44	57.0	100	81.9	14	45	45	220	AL-554


COMPRESSION TYPE ALUMINIUM TUBULAR TERMINALS LONG BARREL



Size sq.mm.	E	A	C	B	D	F	G	H	J	AEMCO Cat No.
2.5	3.2	2	5.5	10.5	6.6	4	4	4	22	LAL-1501
2.5	3.7	2.6	5.5	10.5	7.0	3	4	4	22	LAL-539
4	5.2	2.9	5.5	10.5	12.0	1	6	7	28	LAL-540
6	5.2	3.5	5.5	10.5	7.5	2	6	7	28	LAL-1504
6	6.4	3.5	5.5	10.5	12.0	1	6	7	28	LAL-541
10	4.2	3.8	6.2	10.5	8.4	2	8	9	35	LAL-1505
10	6.4	4.4	7.2	10.5	9.7	3	8	9	35	LAL-542
10	8.2	4.4	7.2	10.5	15.0	2	8	9	35	LAL-543
16	6.4	5.4	8.3	19.5	11.4	3	9	11	44	LAL-505
16	8.2	5.4	8.3	19.5	11.4	3	9	11	44	LAL-506
16	10.2	5.4	8.3	19.5	18.0	2	9	11	44	LAL-507
25	6.4	7.0	9.7	24	13.7	3	10	11	52	LAL-508
25	8.2	7.0	9.7	24	13.7	3	10	11	52	LAL-509
25	10.2	7.0	10.0	24	20.0	2	10	11	52	LAL-510
25	12.8	7.0	10.0	24	20.0	2	10	11	52	LAL-511
35	6.4	8.0	10.8	27	15.4	3	10	11	56	LAL-512
35	8.2	8.0	10.8	27	15.4	3	11	11	56	LAL-513
35	10.2	8.0	10.8	27	20.0	2	11	11	56	LAL-514
35	12.8	8.1	10.8	27	20.0	2	11	11	56	LAL-555
50	8.2	9.3	13.0	33	18.3	4	11	13	65	LAL-515
50	10.2	9.3	13.0	33	18.3	4	11	13	65	LAL-516
50	10.2	9.3	13.0	33	23.0	3	11	13	65	LAL-544
50	12.8	9.3	9.0	33	23.0	3	12	12	65	LAL-517
70	8.2	12	16.0	39	22.6	4	13	13	73	LAL-518
70	10.2	12	16.0	39	22.6	4	13	13	73	LAL-519
70	12.8	12	16.0	39	22.6	4	13	13	73	LAL-520
95	10.2	13	17.1	42	24.5	4	14	14	78	LAL-521
95	12.8	13	17.1	42	24.5	4	14	14	78	LAL-522
95	16.2	13	17.1	42	24.5	4	14	14	78	LAL-523
120	10.2	15	19.6	48	28.2	5	15	15	89	LAL-545
120	12.8	15	19.6	48	28.2	5	15	15	89	LAL-546
120	16.2	15	19.6	48	28.2	5	15	15	89	LAL-547
150	10.2	17	21.5	51	30.9	5	17	17	96	LAL-548
150	12.8	17	21.5	51	30.9	5	17	17	96	LAL-549
150	16.2	17	21.5	51	30.9	5	17	17	96	LAL-550
185	10.2	19	24.0	54	34.6	6	18	18	102	LAL-551
185	12.8	19	24.0	54	34.6	6	18	18	102	LAL-530
185	16.2	19	24.0	54	34.6	6	18	18	102	LAL-531
225	12.8	21	27.0	60	39.0	6	20	20	114	LAL-533
240	12.8	22	28.6	66	41.2	7	22	22	124	LAL-552
240	16.2	22	28.6	66	41.2	7	22	22	124	LAL-532
300	16.2	25	32.0	70.5	46.3	7	27	27	139	LAL-534
300	20.3	25	32.0	70.5	46.3	7	27	27	139	LAL-535
400	20.3	29	37.5	84	54.1	9	31	31	158	LAL-536
500	20.3	31	41.0	90	58.7	10	33	33	170	LAL-537
630	20.3	36	46.0	104	66.6	10	35	35	189	LAL-538
800	-	39	51.0	116	73.3	12	39	39	219	LAL-553
1000	-	44	57.0	150	81.9	14	45	45	270	LAL-554




COMPRESSION TYPE ALUMINIUM CRIMPING FERRULES

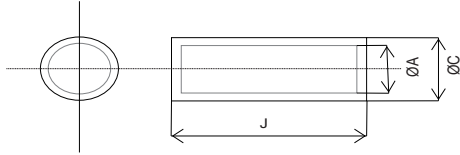

Size (sq.mm.)	A	C	J	AEMCO Cat No.
2.5	2	5.5	16	APC-101
2.5	2.6	5.5	16	APC-102
4.0	2.9	5.5	16	APC-103
6	3.5	5.5	16	APC-104
10	3.8	6.2	20	APC-105
10	4.4	7.2	20	APC-106
16	5.4	8.3	28	APC-107
25	7	9.7	35	APC-108
35	8	10.8	40	APC-109
50	9.3	13	45	APC-110
70	11.6	16	55	APC-111
95	12.9	17.1	60	APC-112
120	15	19.6	65	APC-113
150	16.5	21.5	70	APC-114
185	18.5	24	75	APC-115
225	21	27	85	APC-116
240	22	28.6	90	APC-117
300	25	32	100	APC-118
400	29	37.5	115	APC-119
500	31	41	125	APC-120
630	36	46	140	APC-121
800	39	51	160	APC-122
1000	43.5	57	210	APC-123





COMPRESSION TYPE ALUMINIUM CRIMPING FERRULES (DOUBLE HOLE)



Size (sq.mm.)	E	A	C	D	F	B	G+H	J	AEMCO Cat No.
150	16	16.1	21.2	31	5.2	70.5	55.4	151.5	DHAL-701
240	12	21.5	28	41	6	64	62.3	164.8	DHAL-702
300	16	24	31	45	7	99.5	77.6	211.5	DHAL-703
300	20	24	31	45	7	99.5	77.6	211.5	DHAL-704
300	16	25	32	46.3	7	105	70	218	DHAL-705
630	20	35	46	66.6	10	100	104	255	DHAL-706



ALUMINIUM REDUCER TYPE TERMINAL ENDS (WIRE PIN)

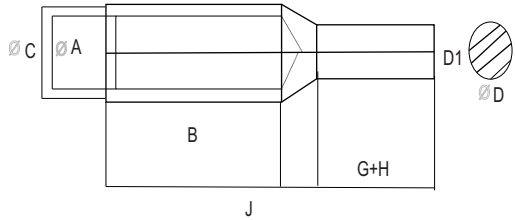

Size (sq.mm)	A	C	D	D1	B	G+H	J	AEMCO Cat No.
2.5	2.6	5.5	3.8	3.3	7	10	21	AWP-2.5A
4	2.9	5.5	4.5	4.0	7	10	21	AWP-4
4	2.9	5.5	3.8	3.3	7	10	21	AWP-4A
6	3.5	5.5	4.5	4.0	7	10	21	AWP-6
6	3.5	5.5	3.8	3.3	7	10	21	AWP-6A
10	3.8	7.4	4.5	4.0	9	10	23	AWP-10
10	3.8	7.4	3.8	3.3	9	10	23	AWP-10A
10	4.4	7.4	4.5	4.0	9	10	23	AWP-10B
10	4.4	7.4	3.8	3.3	9	10	23	AWP-10C
16	5.4	8.3	6.0	5.5	13	15	33	AWP-16
16	5.4	8.3	6.0	5.5	13	20	38	AWP-16A
16	5.4	8.3	3.8	3.3	13	13	31	AWP-16B
25	7.0	10.0	6.0	5.5	16	15	36	AWP-25
25	7.0	10.0	7.5	6.5	16	20	41	AWP-25A
35	8.0	10.8	7.5	6.5	18	20	43	AWP-35
50	9.3	13.0	7.5	6.5	22	20	47	AWP-50
50	10.4	14.3	14.0	13.0	22	24	53	AWP-50A
70	11.6	16.0	7.5	6.5	26	20	51	AWP-70
70	11.6	16.0	11.5	10.5	26	25	56	AWP-70A
70	11.6	16.0	11.5	10.5	26	32	63	AWP-70B
95	12.9	17.1	11.5	10.5	28	25	59	AWP-95
95	12.9	17.1	15.6	14.0	28	27	61	AWP-95A
95	12.9	17.1	7.5	6.5	28	22	56	AWP-95B
95	12.9	17.1	12.8	11.8	28	32	66	AWP-95C
120	14.8	19.6	11.5	10.5	32	25	63	AWP-120
120	14.8	19.6	7.5	6.5	32	22	60	AWP-120A
120	14.8	19.6	11.5	10.5	32	32	70	AWP-120B
120	14.8	19.6	15.6	14.0	32	32	70	AWP-120C
150	16.1	21.2	15.6	14.0	34	32	72	AWP-150
150	16.1	21.2	11.5	10.5	34	32	72	AWP-150A
185	18.0	23.7	15.6	14.0	36	32	74	AWP-185
185	18.0	23.7	11.5	10.5	36	32	74	AWP-185A
225	20.6	27.0	15.6	14.0	40	32	80	AWP-225
225	20.6	27.0	21.0	18.0	40	42	90	AWP-225A
225	20.6	27.0	16.0	15.0	40	42	90	AWP-225B
240	22.0	28.0	16.0	15.0	44	42	94	AWP-240
240	22.0	28.0	15.6	14.0	44	32	84	AWP-240A
300	24.0	31.0	16.0	15.0	47	42	97	AWP-300
300	24.0	31.0	15.6	14.0	47	32	87	AWP-300A





COPPER RING TONGUE TERMINAL ENDS FOR SOLDERLESS CRIMPING TO COPPER OR ALUMINIUM CONDUCTORS



Size (sq. mm.)	E	A	C	D	F	B	H	L-1	J	AEMCO Cat No.
1.5	2.2	1.6	3.2	6	0.8	5	4	11	14	ARS-7103E2
1.5	2.6	1.6	3.2	6	0.8	5	4	11	14	ARS-7103E2.5
1.5	3.2	1.6	3.2	6	0.8	5	4	11	14	ARS-7103E3
1.5	3.7	1.6	3.2	6	0.8	5	4	11	14	ARS-7103E3.5
1.5	4.2	1.6	3.2	6	0.8	5	4	11	14	ARS-7103E4
1.5	3.2	1.6	3.2	6.8	0.8	5	3.6	9.6	13	ARS-7153E3
1.5	3.7	1.6	3.2	6.8	0.8	5	3.6	9.6	13	ARS-7153E3.5
1.5	4.2	1.6	3.2	6.8	0.8	5	3.6	9.6	13	ARS-7153E4
1.5	3.2	1.6	3.2	8	0.8	5	5	12	16	ARS-7104E3
1.5	4.2	1.6	3.2	8	0.8	5	5	12	16	ARS-7104E4
1.5	5.2	1.6	3.2	8	0.8	5	5	12	16	ARS-7104E5
1.5	4.2	1.6	3.2	7	0.8	5	5	11	14.5	ARS-7154E4
1.5	4.2	1.6	3.2	10	0.8	5	6	13	18	ARS-7105E4
1.5	5.2	1.6	3.2	10	0.8	5	6	13	18	ARS-7105E5
1.5	6.4	1.6	3.2	10	0.8	5	6	13	18	ARS-7105E6
1.5	6.4	1.6	3.2	12	0.8	5	6	12	18	ARS-7106E6
2.5	3.2	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7	ARS-7107E3
2.5	3.7	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7	ARS-7107E3.5
2.5	3.7	2.3	3.9	8	0.8	5	5	13	16	ARS-7108E3.5
2.5	4.2	2.3	3.9	8	0.8	5	5	16	16	ARS-7108E4
2.5	5.2	2.3	3.9	8	0.8	5	5	16	16	ARS-7108E5
2.5	5.2	2.3	3.9	10	0.8	5	7	16	18	ARS-7109E5
2.5	6.4	2.3	3.9	10	0.8	5	7	17	18	ARS-7109E6
2.5	5.2	2.3	3.9	12	0.8	5	9	17	22	ARS-7110E5
2.5	6.4	2.3	3.9	12	0.8	5	9	17	22	ARS-7110E6
2.5	8.2	2.3	3.9	12	0.8	5	9	20	22	ARS-7110E8
2.5	6.4	2.3	3.9	16	0.8	5	10	20	25	ARS-7111E6
2.5	8.2	2.3	3.9	16	0.8	5	10	13	25	ARS-7111E8
2.5	10.2	2.3	3.9	16	0.8	5	10	13	25	ARS-7111E10
2.5	10.2	2.3	3.9	18	0.8	5	14	14	29	ARS-7151E10
2.5	12.7	2.3	3.9	18	0.8	5	14	14	29	ARS-7151E12
4-6	4.2	3.5	5.5	8	1.0	6	5	18.8	17	ARS-7155E4
4-6	5.2	3.5	5.5	8	1.0	6	5	14	17	ARS-7155E5
4-6	4.2	3.5	5.5	10	1.0	6	5	14	19	ARS-7112E4
4-6	5.2	3.5	5.5	10	1.0	6	5	14	19	ARS-7112E5
4-6	5.2	3.5	5.5	8	1.0	6	9.8	18.8	22.8	ARS-7157E5
4-6	5.2	3.5	5.5	12	1.0	6	6	14	20	ARS-7113E5
4-6	6.4	3.5	5.5	12	1.0	6	6	14	20	ARS-7113E6
4-6	8.2	3.5	5.5	12	1.0	6	6	14	20	ARS-7113E8
4-6	5.2	3.5	5.5	12	1.0	6	7	16	22	ARS-7114E5
4-6	6.4	3.5	5.5	12	1.0	6	7	16	22	ARS-7114E6
4-6	6.4	3.5	5.5	14	1.0	6	10.5	18.5	25.5	ARS-7115E6
4-6	8.2	3.5	5.5	14	1.0	6	10.5	18.5	25.5	ARS-7115E8
4-6	9.6	3.5	5.5	14	1.0	6	10.5	18.5	25.5	ARS-7115E9.5
4-6	8.2	3.5	5.5	16	1.0	6	13	22	30	ARS-7116E8
4-6	10.2	3.5	5.5	16	1.0	6	13	22	30	ARS-7116E10
4-6	8.2	3.5	5.5	18	1.0	6	12	21	30	ARS-7117E8
4-6	10.2	3.5	5.5	18	1.0	6	12	21	30	ARS-7117E10
4-6	12.7	3.5	5.5	18	1.0	6	13	21	30	ARS-7117E12

Size (sq.mm.)	E	A	C	D	F	B	H	L-1	J	AEMCO Cat No.
10	4.2	4.3	6.3	10	1.0	8	7	17	22	ARS-7118E4
10	5.2	4.3	6.3	10	1.0	8	7	17	22	ARS-7118E5
10	4.2	4.3	6.3	10	1.0	8	4	15	20	ARS-7119E4
10	5.2	4.3	6.3	10	1.0	8	4	15	20	ARS-7119E5
10	6.4	4.3	6.3	12	1.0	8	7	17	23	ARS-7120E6
10	8.2	4.3	6.3	16	1.0	8	7	19	27	ARS-7121E8
10	8.2	4.3	6.3	18	1.0	8	9	21	30	ARS-7122E8
10	10.2	4.3	6.3	18	1.0	8	9	21	30	ARS-7122E10
10	10.2	4.3	6.3	22	1.0	8	10	23	34	ARS-7123E10
10	12.7	4.3	6.3	22	1.0	8	10	23	34	ARS-7123E12
16	5.2	5.6	8.0	10	1.2	10	6	19	24	ARS-7124E5
16	5.2	5.6	8.0	12	1.2	10	6	20	26	ARS-7125E5
16	6.4	5.6	8.0	12	1.2	10	6	20	26	ARS-7125E6
16	6.4	5.6	8.0	16	1.2	10	8	22	30	ARS-7126E6
16	8.2	5.6	8.0	16	1.2	10	8	22	30	ARS-7126E8
16	9.6	5.6	8.0	16	1.2	10	8	22	30	ARS-7126E9.5
16	8.2	5.6	8.0	18	1.2	10	10	24	33	ARS-7127E8
16	10.2	5.6	8.0	18	1.2	10	10	24	33	ARS-7127E10
16	10.2	5.6	8.0	22	1.2	10	8	24	35	ARS-7128E10
16	12.7	5.6	8.0	22	1.2	10	8	24	35	ARS-7128E12
25	6.4	7.5	11.1	12	1.8	11	10	25	31	ARS-7156E6
25	8.2	7.5	11.1	12	1.8	11	10	25	31	ARS-7156E8
25	6.4	7.5	11.1	16	1.8	11	6	22	30	ARS-7129E6
25	8.2	7.5	11.1	16	1.8	11	6	22	30	ARS-7129E8
25	10.2	7.5	11.1	16	1.8	11	6	22	30	ARS-7129E10
25	6.4	7.5	11.1	16	1.8	11	10	25	33	ARS-7130E6
25	8.2	7.5	11.1	16	1.8	11	10	25	33	ARS-7130E8
25	10.2	7.5	11.1	18	1.8	11	9	25	34	ARS-7131E10
25	10.2	7.5	11.1	22	1.8	11	14	31	42	ARS-7132E10
25	12.7	7.5	11.1	22	1.8	11	14	31	42	ARS-7132E12
35	6.4	9	12.6	16	1.8	12	6	23	31	ARS-7133E6
35	8.4	9	12.6	16	1.8	12	6	23	31	ARS-7133E8
35	8.4	9	12.6	18	1.8	12	10	27	36	ARS-7134E8
35	10.2	9	12.6	18	1.8	12	10	27	36	ARS-7134E10
35	10.2	9	12.6	22	1.8	12	15	31	42	ARS-7135E10
35	12.7	9	12.6	22	1.8	12	15	31	42	ARS-7135E12
50	8.2	10.5	14.1	18	1.8	16	12	34	43	ARS-7136E8
50	10.2	10.5	14.1	18	1.8	16	12	34	43	ARS-7136E10
50	10.2	10.5	14.1	22	1.8	16	9	32	43	ARS-7137E10
50	10.2	10.5	14.1	24	1.8	16	14	36	48	ARS-7138E10
50	12.7	10.5	14.1	24	1.8	16	14	36	48	ARS-7138E12
50	16.2	10.5	14.1	32	1.8	16	15	38	54	ARS-7139E16
70	10.2	12	16	22	2.0	18	11	36	47	ARS-7140E10
70	12.7	12	16	22	2.0	18	11	36	47	ARS-7140E12
70	12.7	12	16	24	2.0	18	10	36	48	ARS-7141E12
70	16.2	12	16	28	2.0	18	16	40	54	ARS-7142E16
95	10.2	13.5	18.1	22	2.3	20	10	35	46	ARS-7143E10
95	10.2	13.5	18.1	24	2.3	20	12	38	50	ARS-7144E10
95	12.7	13.5	18.1	24	2.3	20	12	38	50	ARS-7144E12
95	16.2	13.5	18.1	28	2.3	20	17	44	58	ARS-7145E16
120	12.7	15	20.2	26	2.6	22	17	39	52	ARS-7146E12
120	16.2	15	20.2	32	2.6	22	19	48	64	ARS-7147E16
120	20.2	15	20.2	40	2.6	22	20	52	72	ARS-7148E20
150	12.7	16.5	23.7	34	3.6	24	16	49	66	ARS-7149E12
150	16.2	16.5	23.7	34	3.6	24	16	49	66	ARS-7149E16
150	16.2	16.5	23.7	40	3.6	24	20	54	74	ARS-7150E16
150	20.2	16.5	23.7	40	3.6	24	20	54	74	ARS-7150E20



COPPER RING TONGUE TERMINAL ENDS (INSULATED) FOR SOLDERLESS CRIMPING TO COPPER/ALUMINIUM CONDUCTORS



Sq (sq.mm.)	E	A	C	D	F	B	H	L-1	J	J-1	L-3	C-1	AEMCO Cat No.
1.5	2.2	1.6	3.2	6	0.8	5	4	11	14	10	16	4.8	ARSI-7103E2
1.5	2.6	1.6	3.2	6	0.8	5	4	11	14	10	16	4.8	ARSI-7103E2.5
1.5	3.2	1.6	3.2	6	0.8	5	4	11	14	10	16	4.8	ARSI-7103E3
1.5	3.7	1.6	3.2	6	0.8	5	4	11	14	10	16	4.8	ARSI-7103E3.5
1.5	4.2	1.6	3.2	6	0.8	5	4	11	14	10	16	4.8	ARSI-7103E4
1.5	3.2	1.6	3.2	6.8	0.8	5	3.6	9.6	13	10	17	4.8	ARSI-7153E3
1.5	3.7	1.6	3.2	6.8	0.8	5	3.6	9.6	13	10	17	4.8	ARSI-7153E.5
1.5	4.2	1.6	3.2	6.8	0.8	5	3.6	9.6	13	10	17	4.8	ARSI-7153E4
1.5	3.2	1.6	3.2	8	0.8	5	5	12	16	10	14.6	4.8	ARSI-7104E3
1.5	4.2	1.6	3.2	8	0.8	5	5	12	16	10	14.6	4.8	ARSI-7104E4
1.5	5.2	1.6	3.2	8	0.8	5	5	12	16	10	14.6	4.8	ARSI-7104E5
1.5	4.2	1.6	3.2	7	0.8	5	5	11	14.5	10	16	4.8	ARSI-7154E4
1.5	4.2	1.6	3.2	10	0.8	5	6	13	18	10	18	4.8	ARSI-7105E4
1.5	5.2	1.6	3.2	10	0.8	5	6	13	18	10	18	4.8	ARSI-7105E5
1.5	4.6	1.6	3.2	10	0.8	5	6	13	18	10	18	4.8	ARSI-7105E6
1.5	4.6	1.6	3.2	12	0.8	5	6	12	18	10	17	4.8	ARSI-7106E6
2.5	3.2	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7	10	14.5	5.5	ARSI-7107E3
2.5	3.7	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7	10	14.5	5.5	ARSI-7107E3.5
2.5	3.7	2.3	3.9	8	0.8	5	5	12	16	10	17	5.5	ARSI-7108E3.5
2.5	4.2	2.3	3.9	8	0.8	5	5	12	16	10	17	5.5	ARSI-7108E4
2.5	5.2	2.3	3.9	8	0.8	5	5	12	16	10	17	5.5	ARSI-7108E5
2.5	5.2	2.3	3.9	10	0.8	5	7	13	18	10	18	5.5	ARSI-7109E5
2.5	6.4	2.3	3.9	10	0.8	5	7	13	18	10	18	5.5	ARSI-7109E6
2.5	5.4	2.3	3.9	12	0.8	5	9	16	22	10	21	5.5	ARSI-7110E5
2.5	6.4	2.3	3.9	12	0.8	5	9	16	22	10	21	5.5	ARSI-7110E6
2.5	8.2	2.3	3.9	12	0.8	5	9	16	22	10	21	5.5	ARSI-7110E8
2.5	6.4	2.3	3.9	16	0.8	5	10	17	25	10	22	5.5	ARSI-7111E6
2.5	8.2	2.3	3.9	16	0.8	5	10	17	25	10	22	5.5	ARSI-7111E8
2.5	10.2	2.3	3.9	16	0.8	5	10	17	25	10	22	5.5	ARSI-7111E10
2.5	10.2	2.3	3.9	18	0.8	5	14	20	29	10	25	5.5	ARSI-7151E10
2.5	12.7	2.3	3.9	18	0.8	5	14	20	29	10	25	5.5	ARSI-7151E12
4-6	4.2	3.5	5.5	8	1.0	6	5	13	17	14	21	7.1	ARSI-7155E4
4-6	5.2	3.5	5.5	8	1.0	6	5	13	17	14	21	7.1	ARSI-7155E5
4-6	4.2	3.5	5.5	10	1.0	6	5	14	19	14	22	7.1	ARSI-7112E4
4-6	5.2	3.5	5.5	10	1.0	6	5	14	19	14	22	7.1	ARSI-7112E5
4-6	5.2	3.5	5.5	8	1.0	6	9.8	18.8	22.8	14	26	7.1	ARSI-7157E5
4-6	5.2	3.5	5.5	12	1.0	6	6	14	20	14	22	7.1	ARSI-7113E5
4-6	6.4	3.5	5.5	12	1.0	6	6	14	20	14	22	7.1	ARSI-7113E6
4-6	8.2	3.5	5.5	12	1.0	6	6	14	20	14	22	7.1	ARSI-7113E8
4-6	5.2	3.5	5.5	12	1.0	6	7	16	20	14	24	7.1	ARSI-7114E5
4-6	6.4	3.5	5.5	12	1.0	6	7	16	22	14	24	7.1	ARSI-7114E6
4-6	6.4	3.5	5.5	14	1.0	6	10.5	18.5	25.5	14	26.5	7.1	ARSI-7115E6
4-6	8.2	3.5	5.5	14	1.0	6	10.5	18.5	25.5	14	26.5	7.1	ARSI-7115E8
4-6	9.6	3.5	5.5	14	1.0	6	10.5	18.5	25.5	14	26.5	7.1	ARSI-7115E95
4-6	8.2	3.5	5.5	16	1.0	6	13	22	30	14	30	7.1	ARSI-7116E8
4-6	10.2	3.5	5.5	16	1.0	6	13	22	30	14	30	7.1	ARSI-7116E10
4-6	8.2	3.5	5.5	18	1.0	6	12	21	30	14	30	7.1	ARSI-7117E8
4-6	10.2	3.5	5.5	18	1.0	6	12	21	30	14	29	7.1	ARSI-7117E10
4-6	12.7	3.5	5.5	18	1.0	6	13	21	30	14	29	7.1	ARSI-7117E12




COPPER RING TONGUE TERMINAL ENDS (INSULATED) FOR SOLDERLESS CRIMPING TO COPPER/ALUMINIUM CONDUCTORS




Size (sq.mm.)	E	A	C	D	F	B	H	L-1	J	J-1	L-3	C-1	AEMCO Cat No.
10	4.2	4.3	6.3	10	1.0	8	7	17	22	16	25	7.9	ARSI-7118E4
10	5.2	4.3	6.3	10	1.0	8	7	17	22	16	25	7.9	ARSI-7118E5
10	4.2	4.3	6.3	10	1.0	8	4	15	20	16	23	7.9	ARSI-7119E4
10	5.2	4.3	6.3	10	1.0	8	4	15	20	16	23	7.9	ARSI-7119E5
10	6.4	4.3	6.3	12	1.0	8	7	17	23	16	25	7.9	ARSI-7120E6
10	8.2	4.3	6.3	16	1.0	8	7	19	27	16	27	7.9	ARSI-7121E8
10	8.2	4.3	6.3	18	1.0	8	9	21	30	16	29	7.9	ARSI-7122E8
10	10.2	4.3	6.3	18	1.0	8	9	21	30	16	29	7.9	ARSI-7122E10
10	10.2	4.3	6.3	22	1.0	8	10	23	34	16	31	7.9	ARSI-7123E10
10	12.7	4.3	6.3	22	1.0	8	10	23	34	20	31	7.9	ARSI-7123E12
16	5.2	5.6	8	10	1.2	10	6	19	24	20	29	10	ARSI-7124E5
16	5.2	5.6	8	12	1.2	10	6	20	26	20	30	10	ARSI-7125E5
16	6.4	5.6	8	12	1.2	10	6	20	26	20	30	10	ARSI-7125E6
16	6.4	5.6	8	16	1.2	10	8	22	30	20	32	10	ARSI-7126E6
16	8.2	5.6	8	16	1.2	10	8	22	30	20	32	10	ARSI-7126E8
16	9.6	5.6	8	16	1.2	10	8	22	30	20	32	10	ARSI-7126E9.5
16	8.2	5.6	8	18	1.2	10	10	24	33	20	34	10	ARSI-7127E8
16	10.2	5.6	8	18	1.2	10	10	24	33	20	34	10	ARSI-7127E10
16	10.2	5.6	8	22	1.2	10	8	24	35	20	34	10	ARSI-7128E10
16	12.7	5.6	8	22	1.2	10	8	24	35	20	34	10	ARSI-7128E12
25	6.4	7.5	11.1	12	1.8	11	10	25	31	24	38	13.1	ARSI-7156E6
25	8.2	7.5	11.1	12	1.8	11	10	25	31	24	38	13.1	ARSI-7156E8
25	6.4	7.5	11.1	16	1.8	11	6	22	30	24	35	13.1	ARSI-7129E6
25	8.2	7.5	11.1	16	1.8	11	6	22	30	24	35	13.1	ARSI-7129E8
25	10.2	7.5	11.1	16	1.8	11	6	22	30	24	35	13.1	ARSI-7129E10
25	6.4	7.5	11.1	16	1.8	11	10	25	33	24	38	13.1	ARSI-7130E6
25	8.2	7.5	11.1	16	1.8	11	10	25	33	24	38	13.1	ARSI-7130E8
25	10.2	7.5	11.1	18	1.8	11	9	25	34	24	38	13.1	ARSI-7131E10
25	10.2	7.5	11.1	22	1.8	11	14	31	42	24	44	13.1	ARSI-7132E10
25	12.7	7.5	11.1	22	1.8	11	14	31	42	24	44	13.1	ARSI-7132E12
35	6.4	9	12.6	16	1.8	12	6	23	31	24	35	14.6	ARSI-7133E6
35	8.2	9	12.6	16	1.8	12	6	23	31	24	35	14.6	ARSI-7133E8
35	8.2	9	12.6	18	1.8	12	10	27	36	24	39	14.6	ARSI-7134E8
35	10.2	9	12.6	18	1.8	12	10	27	36	24	39	14.6	ARSI-7134E10
35	10.2	9	12.6	22	1.8	12	15	31	42	24	43	14.6	ARSI-7135E10
35	12.7	9	12.6	22	1.8	12	15	31	42	24	43	14.6	ARSI-7135E12
50	8.2	10.5	14.1	18	1.8	16	12	34	43	32	50	16.1	ARSI-7136E8
50	10.2	10.5	14.1	18	1.8	16	12	34	43	32	50	16.1	ARSI-7136E10
50	10.2	10.5	14.1	22	1.8	16	9	32	43	32	48	16.1	ARSI-7137E10
50	10.2	10.5	14.1	24	1.8	16	14	36	48	32	52	16.1	ARSI-7138E10
50	12.7	10.5	14.1	24	1.8	16	14	36	48	32	52	16.1	ARSI-7138E12
50	16.2	10.5	14.1	32	1.8	16	15	38	54	32	54	16.1	ARSI-7139E16
70	10.2	12	16	22	2.0	18	11	36	47	36	54	18.5	ARSI-7140E10
70	12.7	12	16	22	2.0	18	11	36	47	36	54	18.5	ARSI-7140E12
70	12.7	12	16	24	2.0	18	10	36	48	36	54	18.5	ARSI-7141E12
70	16.2	12	16	28	2.0	18	16	40	54	36	58	18.5	ARSI-7142E16

COPPER PIN TYPE TERMINAL ENDS



Size(sq.mm.)	A	C	B	D	E	F	G+H	J	Type	AEMCO Cat No.
1.5	1.6	3.2	5	1.9	-	0.8	10	17	I	LCP-9
1.5	1.6	3.2	5	3.1	-	0.8	10	17	II	LCP-35
1.5	1.6	3.4	5	1.9	-	0.8	10	17	I	LCP-41
2.5	2.3	3.9	5	1.9	-	0.8	10	17	I	LCP-1
2.5	2.3	3.9	5	3.1	-	0.8	10	17	II	LCP-2
4	2.9	4.9	6	2.7	-	1.0	10	20	I	LCP-3
4	3.6	5.6	6	5.1	-	1.0	10	20	II	LCP-4
6	3.6	5.6	6	2.7	-	1.0	10	20	I	LCP-5
6	4	6	6	2.7	-	1.0	10	20	I	LCP-6
10	4.5	6.7	8	.3	2.4	1.1	12	22	III	LCP-7
16	5.8	8.2	10	5.5	2.6	1.2	13	26	III	LCP-8
25	7.5	11.1	11	7	3.6	1.8	16	33	III	LCP-61
35	9	12.6	13	8	4.4	1.8	14	33	III	LCP-62
50	10.5	14.1	16	10.5	3.8	1.8	25	42	III	LCP-63


COPPER PIN TYPE TERMINAL ENDS (INSULATED)



Size (sq.mm)	A	C	B	D	E	F	G+H	J	C-1	J-1	Type	AEMCO Cat No.
1.5	1.6	3.2	5	1.9	-	0.8	10	17	4.8	10	I	LCPI-9
1.5	1.6	3.2	5	3.1	-	0.8	10	17	4.8	10	II	LCPI-35
1.5	1.6	3.4	5	1.9	-	0.8	10	17	4.8	10	I	LCPI-41
2.5	2.3	3.9	5	1.9	-	0.8	10	17	5.5	10	I	LCPI-1
2.5	2.3	3.9	5	3.1	-	0.8	10	17	5.5	10	II	LCPI-2
4	2.9	4.9	6	2.7	-	1.0	10	20	7.2	14	I	LCPI-3
4	3.6	5.6	6	5.1	-	1.0	10	20	7.2	14	II	LCPI-4
6	3.6	5.6	6	2.7	-	1.0	10	20	7.2	14	I	LCPI-5
6	4	6	6	2.7	-	1.0	10	20	7.9	14	I	LCPI-6
16	4.5	6.7	8	4.3	2.4	1.1	12	22	7.9	16	III	LCPI-7
16	5.8	8.2	10	5.5	2.6	1.2	13	26	10	20	III	LCPI-8





COPPER RECTANGULAR TONGUE FORK TERMINAL ENDS



Size (sq.mm.)	E	A	C	D	F	B	H	L-1	J	AEMCO Cat No.
1.5	5.1	1.6	3.2	8	0.8	5	10	17	21	LF-7214
1.5	3.5	1.6	3.2	6.8	0.8	4	4.8	8.8	13	LF-7249
1.5	3	2.0	2.8	6.2	0.4	5	3.1	10.5	13	LF-7250
2.5	3.5	2.3	3.9	6.5	0.8	5	4.3	11.8	15	LF-7251
2.5	5	2.6	4.6	10.6	1.0	6.2	6.2	12.4	21	LF-7280
4-6	3.1	3.5	5.5	6	1.0	6	5.5	11.5	15	LF-7252
4-6	3.5	3.5	5.5	6	1.0	6	5	11	15	LF-7253
10	6.5	4.5	6.9	16	1.2	8	11	19	27	LF-7254
10	8.2	4.5	6.9	16	1.2	8	11	19	27	LF-7255




COPPER RECTANGULAR TONGUE FORK TERMINAL ENDS (INSULATED)



Size (sq.mm)	E	A	C	D	F	B	H	L-1	J	C-1	J-1	L-3	AEMCO Cat No.
1.5	5.1	1.6	3.2	8	0.8	5	10	17	21	4.8	10	27	LFI-7214
1.5	3.5	1.6	3.2	6.8	0.8	4	4.8	8.8	13	4.8	10	20.8	LFI-7249
1.5	3	2.0	2.8	6.2	0.4	5	3.1	10.5	13	4.8	10	20.5	LFI-7250
2.5	3.5	2.3	3.9	6.5	0.8	5	4.3	11.8	15	5.5	10	21.8	LFI-7251
2.5	5	2.6	4.6	10.6	1.0	6.2	6.2	12.4	21	5.5	10	20	LFI-7280
4-6	3.1	3.5	5.5	6	1.0	6	5.5	11.5	15	7.1	14	27.5	LFI-7252
4-6	3.5	3.5	5.5	6	1.0	6	5	11	15	7.1	14	27	LFI-7253
10	6.5	4.5	6.9	16	1.2	8	11	19	27	7.9	16	35	LFI-7254
10	8.2	4.5	6.9	16	1.2	8	11	19	27	7.9	16	35	LFI-7255




COPPER RECTANGULAR TONGUE FORK TERMINAL ENDS (METAL REINFORCEMENT)



Size (sq. mm.)	E	A	C	D	F	B	H	J	A-1	C-1	C-2	J-1	L-3	AEMCO Cat. No.
1.5	5.1	1.6	3.2	8	0.8	5	10	21	3.6	4.8	5.4	10	22	AILF-7214
1.5	3.5	1.6	3.2	6.8	0.8	4	4.8	13	3.6	4.8	5.4	10	14.8	AILF-7249
1.5	3	2	2.5	6.2	0.4	5	3.1	13	3.6	4.8	5.4	10	15.5	AILF-7250
2.5	3.5	2.3	3.9	6.5	0.8	5	4.3	15	4.4	5.4	6	10	16.8	AILF-7251
2.5	5	2.6	4.6	10.6	1.0	6.2	6.2	21	4.4	5.4	6	10	16.2	AILF-7280
4-6	3.1	3.5	5.5	6	1.0	6	5.5	15	6.4	7.1	8.6	15	20.5	AILF-7252
4-6	3.5	3.5	5.5	6	1.0	6	5	15	6.4	7.1	8.6	15	20	AILF-7253
10	6.5	4.5	6.9	16	1.2	8	11	27	6.8	8.3	9.5	17	28	AILF-7254
10	8.2	4.5	6.9	16	1.2	8	11	27	6.8	8.3	9.5	17	28	AILF-7255




COPPER RING TONGUE FORK TERMINAL ENDS



Size (sq. mm)	E	A	C	D	F	B	H	L-1	J	AEMCO Cat.No.
1.5	3.1	1.6	3.2	6	0.8	5	4	11	14	ARS-7103FE3
1.5	3.6	1.6	3.2	6	0.8	5	4	11	14	ARS-7103FE3.5
1.5	3.1	1.6	3.2	6.8	0.8	5	4.6	9.6	13	ARS-7153FE3
1.5	3.6	1.6	3.2	6.8	0.8	5	4.6	9.6	13	ARS-7153FE3.5
1.5	4.1	1.6	3.2	7	0.8	5	5	11	14	ARS-7154FE4
1.5	4.1	1.6	3.2	8	0.8	5	5	12	16	ARS-7104FE4
1.5	5.1	1.6	3.2	10	0.8	5	6	13	18	ARS-7105FE5
1.5	6.1	1.6	3.2	10	0.8	5	6	13	18	ARS-7105FE6
2.5	3.1	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7	ARS-7107FE3
2.5	3.6	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7	ARS-7107FE3.5
2.5	4.1	2.3	3.9	8	0.8	5	5	12	16	ARS-7108FE4
2.5	5.1	2.3	3.9	10	0.8	5	7	13	18	ARS-7109FE5
2.5	6.1	2.3	3.9	10	0.8	5	7	13	18	ARS-7109FE6
4-6	4.1	3.5	5.5	8	1.0	6	5	13	17	ARS-7155FE4
4-6	4.1	3.5	5.5	10	1.0	6	5	14	19	ARS-7112FE4
4-6	5.1	3.5	5.5	10	1.0	6	5	14	19	ARS-7112FE5
4-6	5.1	3.5	5.5	10	1.0	6	7	16	22	ARS-7114FE5
4-6	6.1	3.5	5.5	12	1.0	6	7	16	22	ARS-7114FE6
10	4.1	4.3	6.3	10	1.0	8	7	17	22	ARS-7118FE5
10	5.1	4.3	6.3	10	1.0	8	7	17	22	ARS-7118FE5
10	6.1	4.3	6.3	12	1.0	8	7	17	23	ARS-7120FE6
10	8.1	4.3	6.3	16	1.0	8	7	19	27	ARS-7121FE8
16	5.1	5.6	8	10	1.2	10	6	19	24	ARS-7121FE5
16	6.1	5.6	8	12	1.2	10	6	20	26	ARS-7125FE6
16	8.1	5.6	8	16	1.2	10	8	22	30	ARS-7126FE8
16	8.1	5.6	8	16	1.2	10	10	24	33	ARS-7127FE8





COPPER RING TONGUE FORK TERMINAL ENDS (INSULATED)

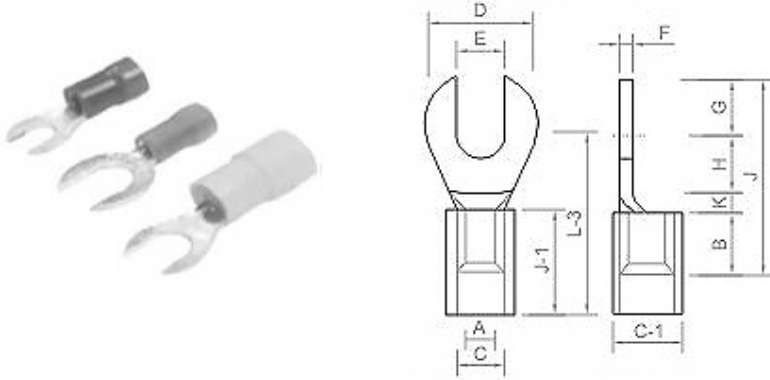

Size (sq.mm)	E	A	C	D	F	B	H	L-1	J	J-1	C-1	L-3	AEMCO Cat No.
1.5	3.1	1.6	3.2	6	0.8	5	4	11	14	10	4.8	16	ARS-7103FE3
1.5	3.6	1.6	3.2	6	0.8	5	4	11	14	10	4.8	16	ARS-7103FE3.5
1.5	3.1	1.6	3.2	6.8	0.8	5	4.6	9.6	13	10	4.8	14.6	ARS-7153FE3
1.5	3.6	1.6	3.2	6.8	0.8	5	4.6	9.6	13	10	4.8	14.6	ARS-7153FE3.5
1.5	4.1	1.6	3.2	7	0.8	5	5	11	14	10	4.8	16	ARS-7154FE4
1.5	4.1	1.6	3.2	8	0.8	5	5	12	16	10	4.8	17	ARS-7104FE4
1.5	5.1	1.6	3.2	10	0.8	5	6	13	18	10	4.8	18	ARS-7105FE5
1.5	6.1	1.6	3.2	10	0.8	5	6	13	18	10	4.8	18	ARS-7105FE6
2.5	3.1	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7	10	4.8	14.5	ARS-7107FE3
2.5	3.6	2.3	3.9	6.5	0.8	5	3.5	9.5	12.7	10	5.5	14.5	ARS-7107FE3.5
2.5	4.1	2.3	3.9	8	0.8	5	5	12	16	10	5.5	17	ARS-7108FE4
2.5	5.1	2.3	3.9	10	0.8	5	7	13	18	10	5.5	18	ARS-7109FE5
2.5	6.1	2.3	3.9	10	0.8	5	7	13	18	10	5.5	18	ARS-7109FE6
4-6	4.1	3.5	5.5	8	1.0	6	5	13	17	14	5.5	21	ARS-7155FE4
4-6	4.1	3.5	5.5	10	1.0	6	5	14	19	14	7.1	22	ARS-7112FE4
4-6	5.1	3.5	5.5	10	1.0	6	5	14	19	14	7.1	22	ARS-7112FE5
4-6	5.1	3.5	5.5	10	1.0	6	7	16	22	14	7.1	24	ARS-7114FE5
4-6	6.1	3.5	5.5	12	1.0	6	7	16	22	14	7.1	24	ARS-7114FE6
10	4.1	4.3	6.3	10	1.0	8	7	17	22	16	7.9	25	ARS-7118FE5
10	5.1	4.3	6.3	10	1.0	8	7	17	22	16	7.9	25	ARS-7118FE5
10	6.1	4.3	6.3	12	1.0	8	7	17	23	16	7.9	25	ARS-7120FE6
10	8.1	4.3	6.3	16	1.0	8	7	19	27	16	7.9	27	ARS-7121FE8
16	5.1	5.6	8	10	1.2	10	6	19	24	20	10	29	ARS-7121FE5
16	6.1	5.6	8	12	1.2	10	6	20	26	20	10	30	ARS-7125FE6
16	8.1	5.6	8	16	1.2	10	8	22	30	20	10	32	ARS-7126FE8
16	8.1	5.6	8	16	1.2	10	10	24	33	20	10	34	ARS-7127FE8



OPEN CLOSE SOLDERING TYPE SOCKETS



Size (sq.mm)	A	C	D	E	F	B	L-1	J	AEMCO Cat No.
1.5	1.6	3.2	7	4.2	0.8	5	11.5	15	AOC-401
2.4	2.3	3.9	9	5.2	0.8	6	13.5	18	AOC-402
4	2.8	4.8	9	5.2	1.0	6	15.5	20	AOC-403
6	3.6	5.6	12	6.5	1.0	7	18	24	AOC-404
10	4.4	6.4	12	6.5	1.0	9	21	27	AOC-405
16	5.4	7.8	15	8.2	1.2	11	24.5	32	AOC-406
25	7	10.2	15	8.2	1.6	14	28.5	36	AOC-407
35	8	11.2	18	8.2	1.6	15	32	41	AOC-408
50	9.5	13.1	24	10.3	1.8	18	38	50	AOC-409
70	11.8	15.8	28	10.3	2.0	23	44	58	AOC-410
95	13.5	18.7	32	12.9	2.5	25	50	66	AOC-411
120	15.5	21.1	34	12.9	2.8	29	56	73	AOC-412
150	16.5	22.9	38	12.9	3.2	30	60	79	AOC-413
185	18.5	25.7	42	16.5	3.6	35	66	87	AOC-414
225	21	28.2	44	16.5	3.6	40	70	92	AOC-415
240	22.5	30.5	48	16.5	4.0	42	76	100	AOC-416
300	25	34	54	20.5	4.5	45	83	110	AOC-417
400	29.5	39.5	62	20.5	5.0	54	94	125	AOC-418
500	32	42.8	62	23.5	5.8	58	106	137	AOC-419
625	36	46.8	70	23.5	5.8	65	113	148	AOC-420

AJAY ELECTRIC & METAL INDUSTRIES

AJAY ELECTRIC & METAL INDUSTRIES

MFG: Copper lugs, braids & copper terminals

**Working Add: 7 Ramnagar Ind. Estate Khairpada Road, Near Gaurav Kirana Stores,
Waliv, Vasai (East) Dist Thane: 401208 Phn no: 0250-6803424**

Off Add: 5/534, Vanrai Colony, opp. Nirlon, Goregaon(East), Mumbai - 400065

Contact no.: 9225127874 Email id: ajayelect_56@rediffmail.com/hotmail.com